



TOTEM


Elegance O-Series

Create impressive space for all target audience

Indoor

Promote your corporate image with such detail and excellent visibility

Unisign Totem is a good connection way between the target audience and your brand. It helps that you draw visitors attention and deliver messages more effectively with stunning visibility. Also it supports sharing rich visual contents, advertisement and information about anything you want.

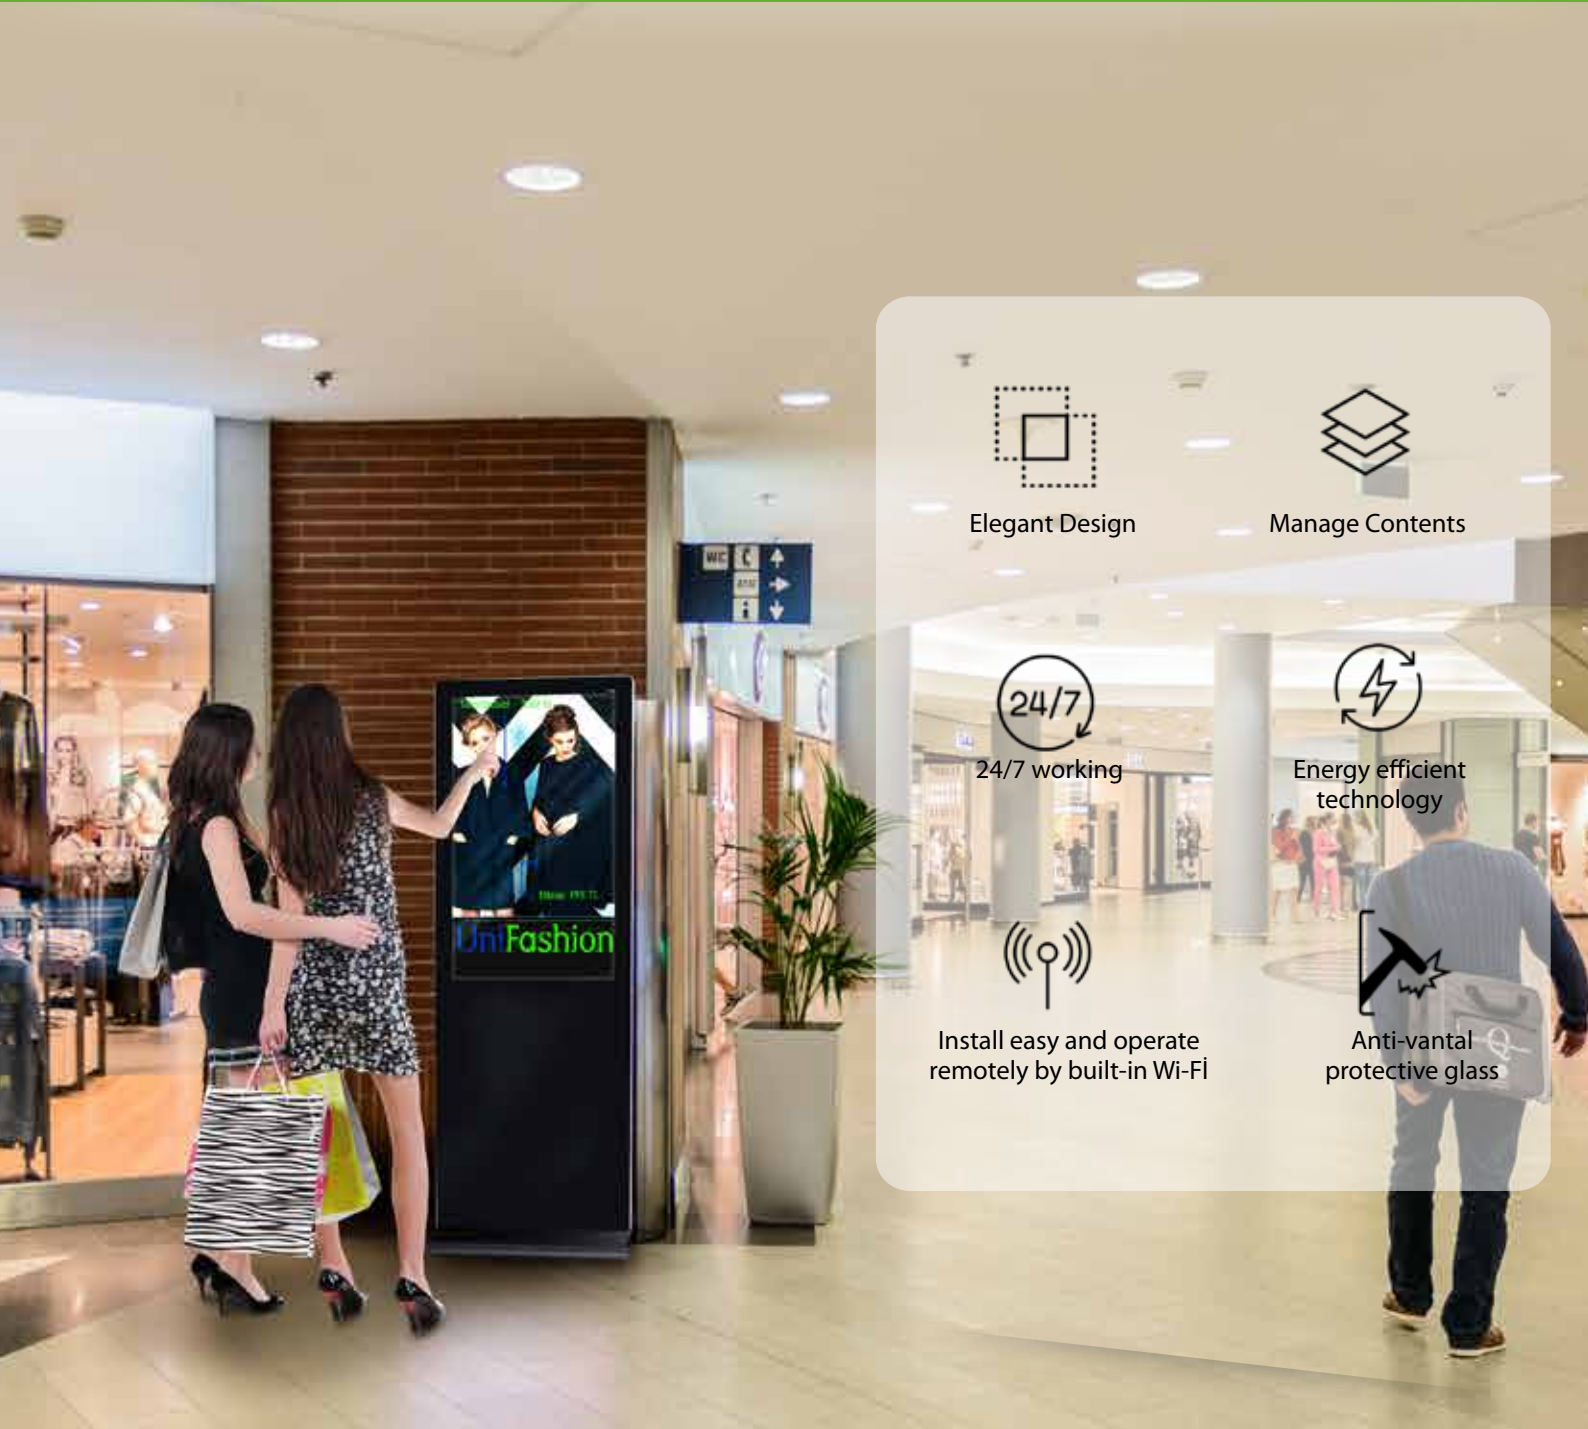

Present strikingly messaging with new generation digital solutions

Unisign Totem can be easily adapted and developed not only for several applications but also every sectors. It enables interaction with multimedia content, maps, information, advertising posters, websites, videos and more.



Built in Wi-Fi

As well as having an Ethernet and LAN ports you can wirelessly connect to the internet thanks to the built in Wi-Fi.

High Brightness and Vibrant Colors

High brightness value in the range of 500-750nit to attract more attention to your contents and clear view from every point.

Optional Touch Technology

The most popular interactive applications durable and reliable touch technology for ease of use.

Branding and Color Applications

Provides you to highlight your corporate identity with unique color and logo application.



Application Specific Design

Designed with discreet retractable casters for easy manoeuvrability. Depending on where you are positioning, special foot design can be made.

Long Life Industrial Display

Designed for use in commercial applications this screen can run 24/7. There are no external buttons or controls to avoid tampering.

Front Protection Glass

It is manufactured from glass that is reinforced by chemical processes and is resistant to very high piercing. Provides additional protection against physical impact during use.

Durable Cabinet Construction

Unisign Tothems have a special aluminium body. By this means, beside its stunning visuality, product is protected from all possible environmental and individual risks.

Rich Entegration System

It has the infrastructure that can work seamlessly with Windows and Android platforms.

Audio

Optional integrated speaker also has an audio out port for connecting head phones or external speakers.

PANEL	TI215EA-OS	TI320MA-OS	TI430MA-OS	TI490MA-OS	TI550MA-OS
Panel Size	21.5"	32"	43"	49"	55"
Panel Type	60Hz ELED	60Hz ELED	60Hz ELED	60Hz ELED	60Hz ELED
Resolution	1920x1080 (16:9) [FHD]	1920x1080 (16:9) [FHD]	1920x1080 (16:9) [FHD]	1920x1080 (16:9) [FHD]	1920x1080 (16:9) [FHD]
Active Display Area(mm)	476.64(H) X 268.11(V)	698.4(H)X392.85(V)	940.89(H) x 529.25(V)	1073.779(H) x 604.00(V)	1209.6(H) X 680.4(V)
Brightness (Typ.)	350 cd/m ²	500 cd/m ²	500 cd/m ²	500 cd/m ²	500 cd/m ²
Contrast	1300:1 (Typ.) (TM)	3000:1 (Typ.) (TM)	3000:1 (Typ.) (TM)	3000:1 (Typ.) (TM)	3000:1 (Typ.) (TM)
Viewing Angle (H x V)	170° x 170°	178° x 178°	178° x 178°	178° x 178°	178° x 178°
Response Time (G-to-G)	30 ms (G to G)	8 ms (G to G)	8 ms (G to G)	8 ms (G to G)	8 ms (G to G)
Frame Design	Oval	Oval	Oval	Oval	Oval
Applications	Horizontal/Vertical	Horizontal/Vertical	Horizontal/Vertical	Horizontal/Vertical	Horizontal/Vertical

PANEL CONNECTIVITY

Video Input/Output	HDMI /DVI	HDMI /DVI	HDMI /DVI	HDMI /DVI	HDMI /DVI
Audio Input / Output	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack

POWER

Power Type	Internal	Internal	Internal	Internal	Internal
Power Requirement	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz
Power Consumption	49W	154W	154W	190W	190W
Standby Mode	<0,5W	<0,5W	<0,5W	<0,5W	<0,5W

DIMENSIONS

Product Size(mm) (w x h x d)	405 x 1640 x 60	525 x 1751 x 66	650 x 1800 x 66	730 x 1860 x 70	820 x 1860 x 75
Package Size (mm)	510 x 1750 x 200	630 x 1850 x 200	750 x 1900 x 200	830 x 1960 x 200	920 x 1960 x 200
Product Weight(kg)	42	50	60	63	70
Package Weight(kg)	52	60	70	73	80

OPERATION

Operation Life	7/24 - 50.000 hours	7/24 - 50.000 hours	7/24 - 50.000 hours	7/24 - 50.000 hours	7/24 - 50.000 hours
Working Conditions	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C
Humidity	10 ~ 80%	10 ~ 80%	10 ~ 80%	10 ~ 80%	10 ~ 80%

CERTIFICATION AND COMPATIBILITY

Safety	EN60950-1	EN60950-1	EN60950-1	EN60950-1	EN60950-1
EMC	Class A	Class A	Class A	Class A	Class A
Environment	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)

OPTIONAL ACCESSORIES

Touch Overlay, Protection Glass Overlay, Protection Glare Overlay, Logo Overlay	
---	--

OTHER

Included in Pocket	Easy Installation Guide, Warranty Document, Power Cable (Other Accessories Externally)
--------------------	--

PANEL	TI490MA-OD	TI550MA-OD
Panel Size	49"	55"
Panel Type	60Hz ELED	60Hz ELED
Resolution	1920x1080 (16:9) [FHD]	1920x1080 (16:9) [FHD]
Active Display Area (mm)	1073.779(H) x 604.00(V)	1209.6(H) X 680.4(V)
Brightness (Typ.)	500 cd/m ²	500 cd/m ²
Contrast	3000:1 (Typ.) (TM)	3000:1 (Typ.) (TM)
Viewing Angle (H x V)	178° x 178°	178° x 178°
Response Time (G-to-G)	8 ms (G to G)	8 ms (G to G)
Applications	Horizontal/Vertical	Horizontal/Vertical
PANEL CONNECTIVITY		
Video Input/Output	HDMI / DVI / VGA	HDMI / DVI / VGA
Audio Input / Output	Stereo mini Jack	Stereo mini Jack
POWER		
Power Type	Internal	Internal
Power Requirement	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz
Power Consumption	190W	190W
Standby Mode	<0,5W	<0,5W
DIMENSIONS		
Product Size(mm) (w x h x d)	850 x 1960 x 180	850 x 1960 x 180
Package Size (mm)	950 x 2060 x 180	950 x 2060 x 280
Product Weight(kg)	90	110
Package Weight(kg)	102	125
OPERATION		
Operation Life	7/24 - 50.000 hours	7/24 - 50.000 hours
Working Conditions	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C
Humidity	10 ~ 80%	10 ~ 80%
CERTIFICATION AND COMPATIBILITY		
Safety	EN60950-1	EN60950-1
EMC	Class A	Class A
Environment	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)
OPTIONAL ACCESSORIES		
Touch Overlay, Protection Glass Overlay, Protection Glare Overlay, Logo Overlay		
OTHER		
Included in Pocket	Easy Installation Guide, Warranty Document, Power Cable (Other Accessories Externally)	



unisigns



unisigns



unisigns



unisign

www.unisign.com.tr

info@unisign.com.tr



TOTEM

Elegance K Series