



KIOSK

Active Series

Create impressive space for all target audience

Indoor

Promote your corporate image with such detail and excellent visibility


Unisign Kiosk is a good connection way between the target audience and your brand. It helps that you draw visitors attention and deliver messages more effectively with stunning visibility. Also it supports sharing rich visual contents, advertisement and information about anything you want.




Energy Efficient Technology



Manage Contents



7/24 Working



Elegant Design



Superior Visibility and Brightness




Network Upgrade



Present strikingly messaging with new generation digital solutions

Unisign Kiosks enable interaction with multimedia content, maps, information, advertising posters, websites, video and more for you can contact with any audiences anywhere. It enables interaction with multimedia content, maps, information, advertising posters, websites, videos and more.

Maximize your performance with a fast and precise touchscreen that captures the same interactivity from a few touch points.

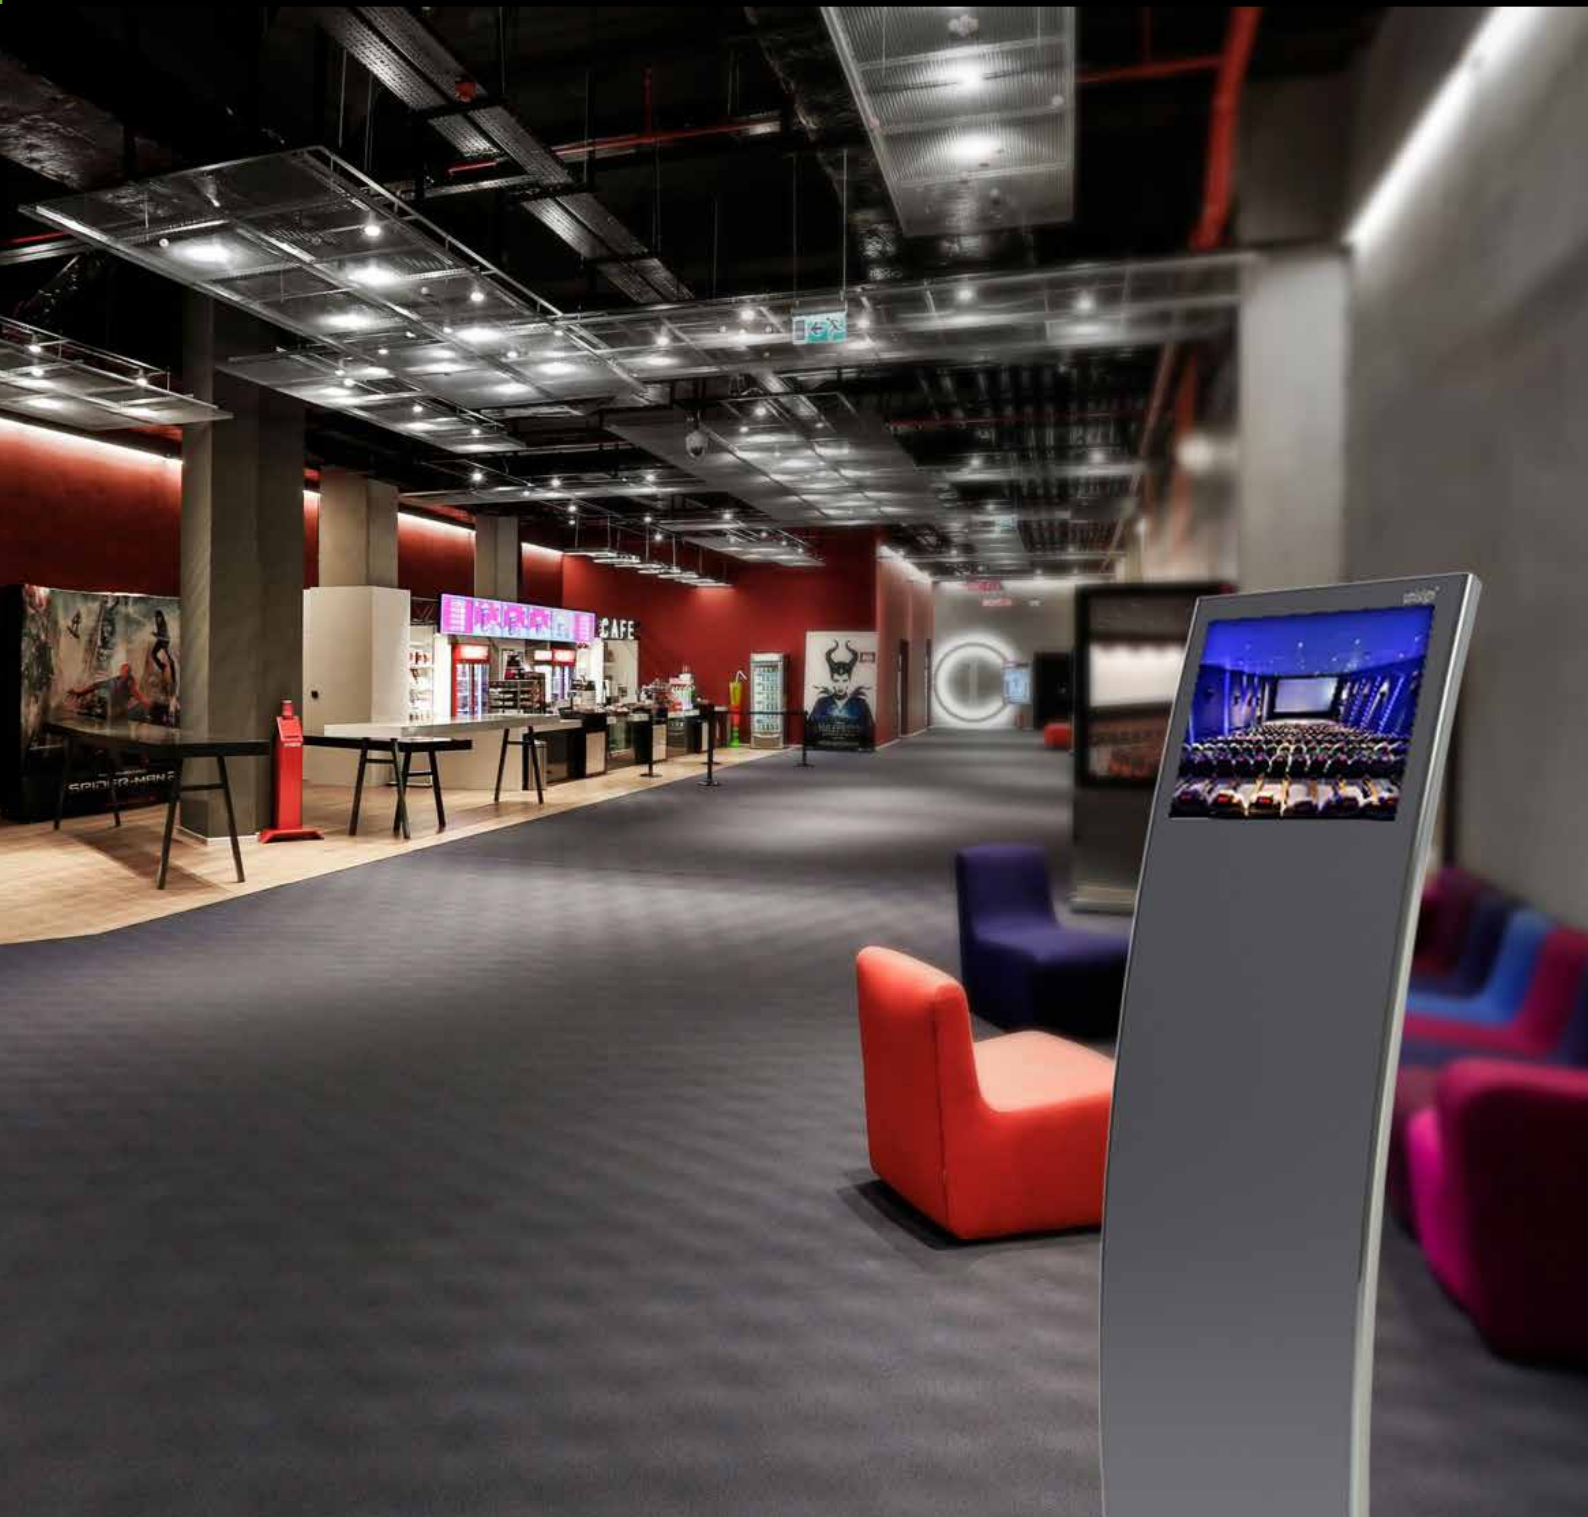

Touch screens that can be used in many areas such as entertainment, advertising, referrals and informations create interactive and entertaining environments that capture your interaction with your target audience.

Optional Wireless Connections

It has the Bluetooth, NFC and RFID



Built in Wi-Fi

As well as having an Ethernet and LAN ports you can wirelessly connect to the internet thanks to the built in Wi-Fi.

Front Protection Glass

It is manufactured from glass that is reinforced by chemical processes and is resistant to very high piercing. Provides additional protection against physical impact during use.

Long Life Industrial Display

Designed for use in commercial applications this screen can run 24/7. There are no external buttons or controls to avoid tampering.

Touch Tehcnology

The most popular interactive applications durable and reliable touch technology for ease of use.

Audio

Optional integrated speaker also has an audio out port for connecting headphones or external speakers.

Branding and Color Applications

Provides you to highlight your corporate identity with unique color and logo application.

Rich Entegration System

It has the infrastructure that can work seamlessly with Windows and Android platforms.

Application Specific Design

Designed with discreet retractable casters for easy manoeuvrability. Depending on where you are positioning, special foot design can be made.

Optional Accessories

Barcode Reader, NFC, RFID, Beacon, Bluetooth, Pin Pad, Camera, Industrial Keyboard, Receipt Printer, Audio System, Glass Protector, Mirror Protector, Glass Logo, Colorful Glass



KS150EA-AP

PANEL	KS121EA-AP	KS150EA-AP	KS170EA-AP	KS185EA-AP	KS215EA-AP
Panel Size	12,1"	15"	17"	18,5"	21,5"
Panel Type	60Hz ELED	60Hz ELED	60Hz ELED	60Hz ELED	60Hz ELED
Resolution	1024 X 768	1024 X 768	1280 X 1024	1920 X 1080	1920 X 1080
Brightness (Typ.)	350 cd/m ²	350 cd/m ²	350 cd/m ²	350 cd/m ²	350 cd/m ²
Contrast	1300:1 (Typ.) (TM)	1300:1 (Typ.) (TM)	1300:1 (Typ.) (TM)	1300:1 (Typ.) (TM)	1300:1 (Typ.) (TM)
Viewing Angle (H x V)	170° x 170°	170° x 170°	170° x 170°	170° x 170°	170° x 170°
Response Angle (G-to-G)	16 ms (G to G)	16 ms (G to G)	16 ms (G to G)	16 ms (G to G)	16 ms (G to G)
Active Display Area (mm)	243.36 (H) x 184.32 (V)	304.2 (H) x 228.3 (V)	342 (H) x 274 (V)	410 (H) x 231 (V)	476,64(H) x 268,11(V)
Touch Type	PCAP - 2 Ponit	PCAP - 2 Ponit	PCAP - 2 Ponit	PCAP - 2 Ponit	PCAP - 2 Ponit

PANEL CONNECTIVITY

Video Input	VGA, HDMI, DVI	VGA, HDMI, DVI	VGA, HDMI, DVI	VGA, HDMI, DVI	VGA, HDMI, DVI
Video Output	N/A	N/A	N/A	N/A	N/A
Audio Input / Output	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack
USB	N/A	N/A	N/A	N/A	N/A
Internal Control	N/A	N/A	N/A	N/A	N/A

POWER

Power Type	Adapter	Adapter	Adapter	Adapter	Adapter
Power Requirement	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz
Power Consumption	22W	27W	27W	42W	49W
Standby Mode	<0,5W	<0,5W	<0,5W	<0,5W	<0,5W

DIMENSIONS

Product Size(mm) (w x h x d)	350 x 1300 x 350	400 x 1300 x 300	420 x 1400 x 400	500 x 1400 x 400	600 x 1400 x 400
Package Size (mm)	400 x 1400x 400	450 x 1400 x 400	470 x 1500 x 450	550 x 1500 x 450	650 x 1500 x 450
Product Weight(kg)	20	22	22	25	26
Package Weight(kg)	27	29	29	31	32

OPERATION

Operation Life	7/24 - 50.000 hours	7/24 - 50.000 hours	7/24 - 50.000 hours	7/24 - 50.000 hours	7/24 - 50.000 hours
Working Conditions	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C
Humidity	10 ~ 80%	10 ~ 80%	10 ~ 80%	10 ~ 80%	10 ~ 80%

CERTIFICATION AND COMPATIBILITY

Safety	EN60950-1	EN60950-1	EN60950-1	EN60950-1	EN60950-1
EMC	Class A	Class A	Class A	Class A	Class A
Environment	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)

OPTIONAL ACCESSORIES

	Barcode, NFC, RFID, Beacon, Bluetooth, Camera, Pin Pad, Industrial Keyboard, Receipt Printer, Audio System, Glass Protector, Mirror Protector, Glass Logo, Colorful Glass
--	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------

OTHER

Included in Packet	Easy Installation Guide, Warranty Document, Power Cable (Other Accessories Externally)
--------------------	-------------------------------------------------------------------------------------------

Included Camera

It has the camera that can record movie in high resolution.



Built in Wi-Fi

As well as having an Ethernet and LAN ports you can wirelessly connect to the internet thanks to the built in Wi-Fi.

Front Protection Glass

It is manufactured from glass that is reinforced by chemical processes and is resistant to very high piercing. Provides additional protection against physical impact during use.

Touch Tehcnology

The most popular interactive applications durable and reliable touch technology for ease of use.

Long Life Industrial Display

Designed for use in commercial applications this screen can run 24/7. There are no external buttons or controls to avoid tampering.

Audio

Optional integrated speaker also has an audio out port for connecting headphones or external speakers.

Branding and Color Applications

Provides you to highlight your corporate identity with unique color and logo application.

Rich Entegration System

It has the infrastructure that can work seamlessly with Windows and Android platforms.

Application Specific Design

Designed with discreet retractable casters for easy manoeuvrability. Depending on where you are positioning, special foot design can be made.

Optional Accessories

Barcode Reader, NFC, RFID, Beacon, Bluetooth, Pin Pad, Camera, Industrial Keyboard, Receipt Printer, Audio System, Glass Protector, Mirror Protector, Glass Logo, Colorful Glass



KS150EA-BP

PANEL	KS121EA-BP	KS150EA-BP	KS170EA-BP	KS185EA-BP	KS215EA-BP
Panel Size	12,1"	15"	17"	18,5"	21,5"
Panel Type	60Hz ELED	60Hz ELED	60Hz ELED	60Hz ELED	60Hz ELED
Resolution	1024 X 768	1024 X 768	1280 X 1024	1920 X 1080	1920 X 1080
Brightness (Typ.)	350 cd/m ²	350 cd/m ²	350 cd/m ²	350 cd/m ²	350 cd/m ²
Contrast	1300:1 (Typ.) (TM)	1300:1 (Typ.) (TM)	1300:1 (Typ.) (TM)	1300:1 (Typ.) (TM)	1300:1 (Typ.) (TM)
Viewing Angle (H x V)	170° x 170°	170° x 170°	170° x 170°	170° x 170°	170° x 170°
Response Angle (G-to-G)	16 ms (G to G)	16 ms (G to G)	16 ms (G to G)	16 ms (G to G)	16 ms (G to G)
Active Display Area (mm)	243.36 (H) x 184.32 (V)	304.2 (H) x 228.3 (V)	342 (H) x 274 (V)	410 (H) x 231 (V)	476,64(H) x 268,11(V)
Touch Type	PCAP - 2 Ponit	PCAP - 2 Ponit	PCAP - 2 Ponit	PCAP - 2 Ponit	PCAP - 2 Ponit

PANEL CONNECTIVITY

Video Input	VGA, HDMI, DVI	VGA, HDMI, DVI	VGA, HDMI, DVI	VGA, HDMI, DVI	VGA, HDMI, DVI
Video Output	N/A	N/A	N/A	N/A	N/A
Audio Input / Output	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack
USB	N/A	N/A	N/A	N/A	N/A
Internal Control	N/A	N/A	N/A	N/A	N/A

POWER

Power Type	Adapter	Adapter	Adapter	Adapter	Adapter
Power Requirement	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz
Power Consumption	22W	27W	27W	42W	49W
Standby Mode	<0,5W	<0,5W	<0,5W	<0,5W	<0,5W

DIMENSIONS

Product Size(mm) (w x h x d)	500 x 1300 x 350	550 x 1300 x 350	600 x 1450 x 400	650 x 1450 x 400	740 x 1485 x 425
Package Size (mm)	550 x 1400 x 400	600 x 1400 x 400	650 x 1550 x 450	730 x 1550 x 450	800 x 1600 x 475
Product Weight(kg)	32	36	40	40	42
Package Weight(kg)	40	44	48	48	50

OPERATION

Operation Life	7/24 - 50.000 hours	7/24 - 50.000 hours	7/24 - 50.000 hours	7/24 - 50.000 hours	7/24 - 50.000 hours
Working Conditions	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C
Humidity	10 ~ 80%	10 ~ 80%	10 ~ 80%	10 ~ 80%	10 ~ 80%

CERTIFICATION AND COMPATIBILITY


Safety	EN60950-1	EN60950-1	EN60950-1	EN60950-1	EN60950-1
EMC	Class A	Class A	Class A	Class A	Class A
Environment	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)

OPTIONAL ACCESSORIES

	Barcode, NFC, RFID, Beacon, Bluetooth, Camera, Pin Pad, Industrial Keyboard, Receipt Printer, Audio System, Glass Protector, Mirror Protector, Glass Logo, Colorful Glass
--	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------

OTHER

Included in Packet	Easy Installation Guide, Warranty Document, Power Cable (Other Accessories Externally)
--------------------	-------------------------------------------------------------------------------------------

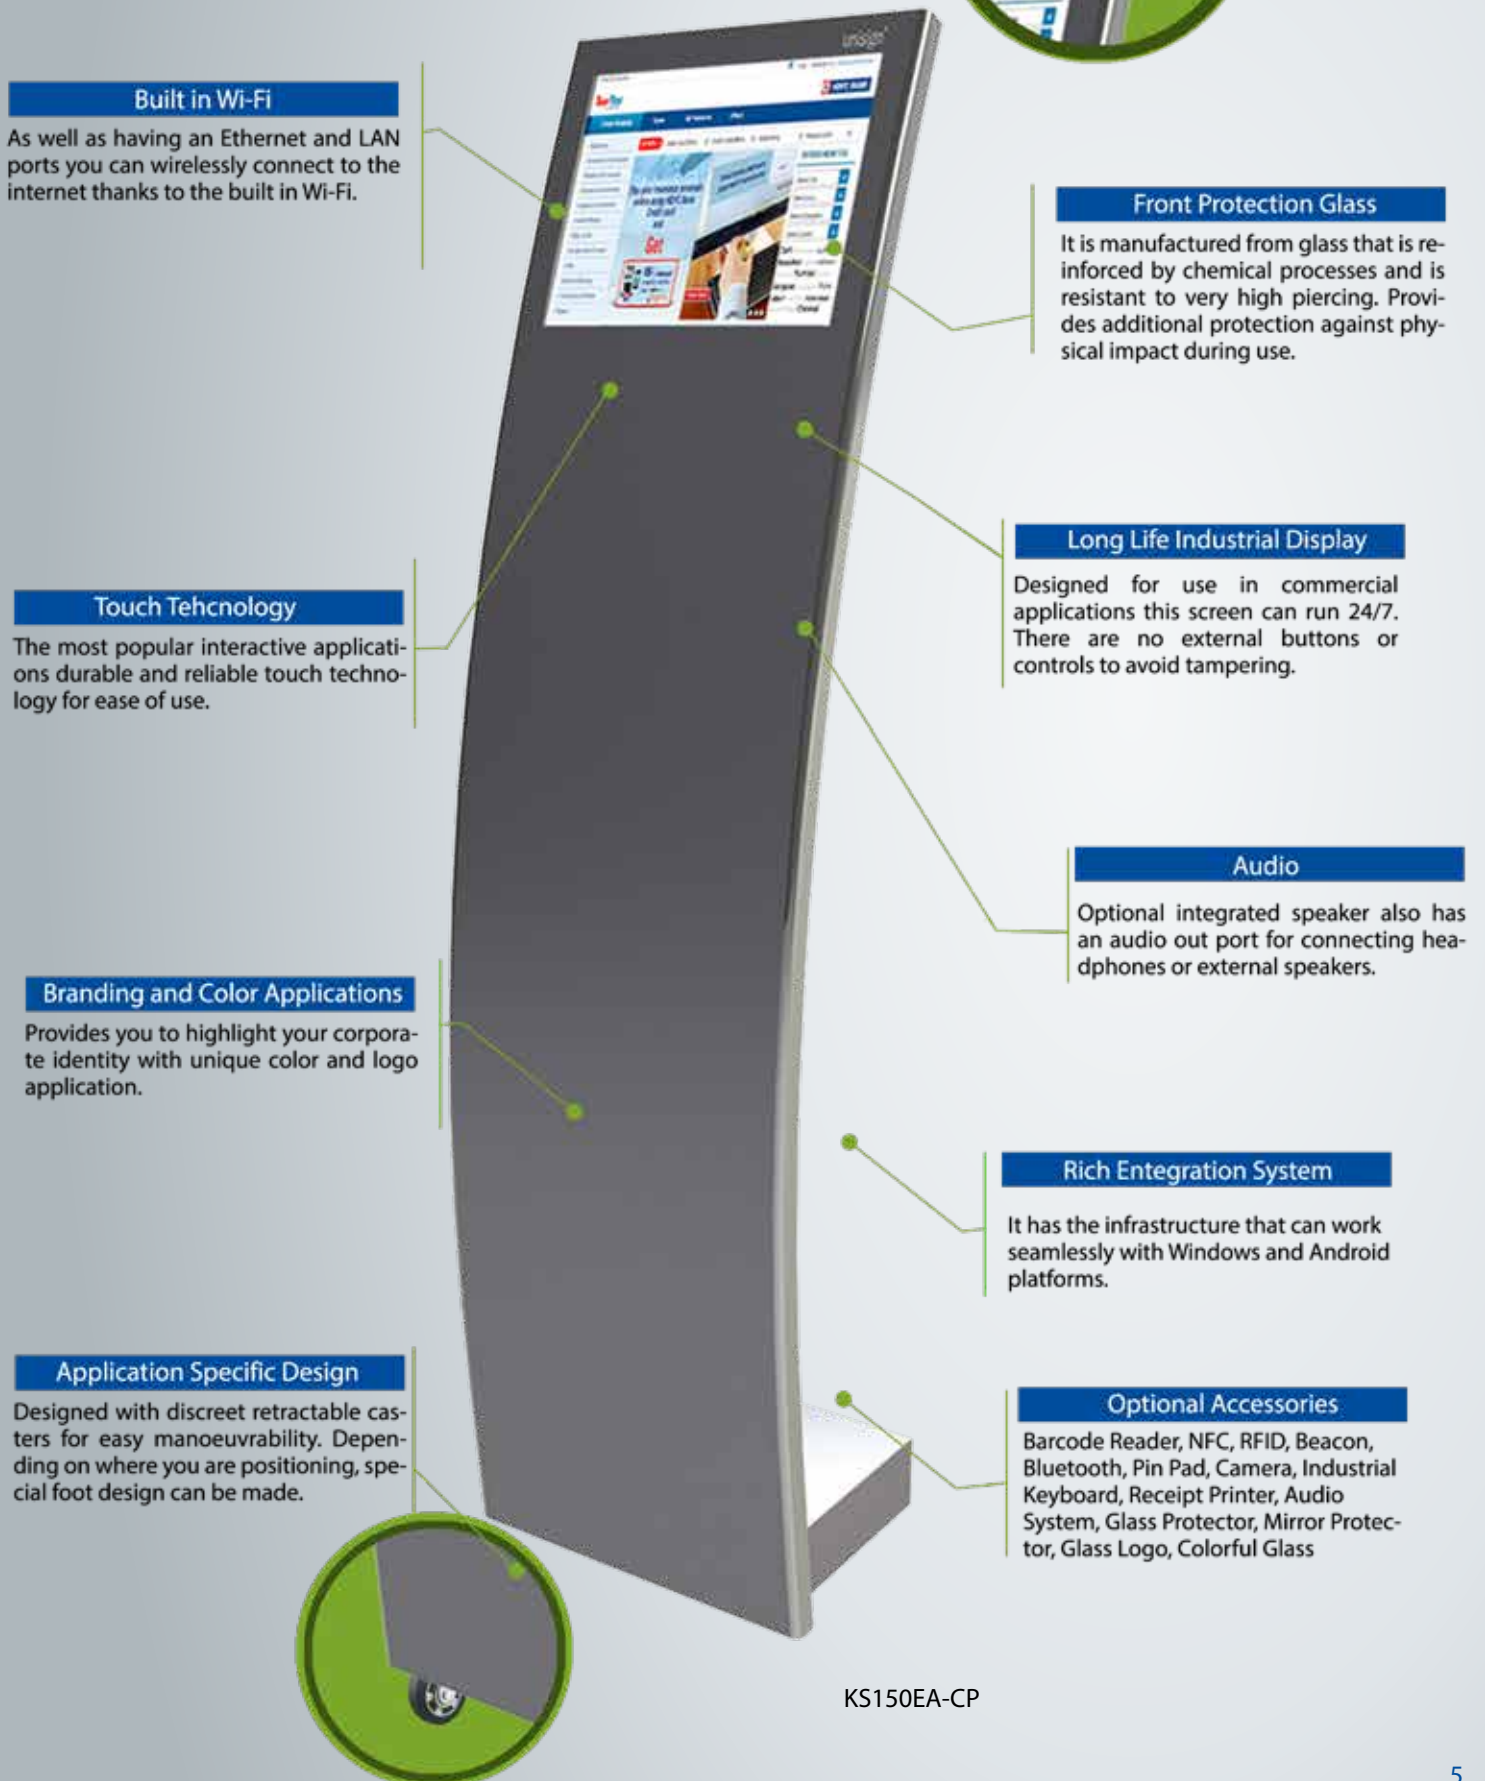

Built in Wi-Fi

As well as having an Ethernet and LAN ports you can wirelessly connect to the internet thanks to the built in Wi-Fi.

Front Protection Glass

It is manufactured from glass that is reinforced by chemical processes and is resistant to very high piercing. Provides additional protection against physical impact during use.

Touch Tehcnology

The most popular interactive applications durable and reliable touch technology for ease of use.

Long Life Industrial Display

Designed for use in commercial applications this screen can run 24/7. There are no external buttons or controls to avoid tampering.

Audio

Optional integrated speaker also has an audio out port for connecting headphones or external speakers.

Branding and Color Applications

Provides you to highlight your corporate identity with unique color and logo application.

Rich Entegration System

It has the infrastructure that can work seamlessly with Windows and Android platforms.

Application Specific Design

Designed with discreet retractable casters for easy manoeuvrability. Depending on where you are positioning, special foot design can be made.

Optional Accessories

Barcode Reader, NFC, RFID, Beacon, Bluetooth, Pin Pad, Camera, Industrial Keyboard, Receipt Printer, Audio System, Glass Protector, Mirror Protector, Glass Logo, Colorful Glass

KS150EA-CP

PANEL	KS121EA-CP	KS150EA-CP	KS170EA-CP	KS185EA-CP	KS215EA-CP
Panel Size	12,1"	15"	17"	18,5"	21,5"
Panel Type	60Hz ELED	60Hz ELED	60Hz ELED	60Hz ELED	60Hz ELED
Resolution	1024 X 768	1024 X 768	1280 X 1024	1920 X 1080	1920 X 1080
Brightness (Typ.)	350 cd/m ²	350 cd/m ²	350 cd/m ²	350 cd/m ²	350 cd/m ²
Contrast	1300:1 (Typ.) (TM)	1300:1 (Typ.) (TM)	1300:1 (Typ.) (TM)	1300:1 (Typ.) (TM)	1300:1 (Typ.) (TM)
Viewing Angle (H x V)	170° x 170°	170° x 170°	170° x 170°	170° x 170°	170° x 170°
Response Angle (G-to-G)	16 ms (G to G)	16 ms (G to G)	16 ms (G to G)	16 ms (G to G)	16 ms (G to G)
Active Display Area (mm)	243.36 (H) x 184.32 (V)	304.2 (H) x 228.3 (V)	342 (H) x 274 (V)	410 (H) x 231 (V)	476,64(H) x 268,11(V)
Touch Type	PCAP - 2 Ponit	PCAP - 2 Ponit	PCAP - 2 Ponit	PCAP - 2 Ponit	PCAP - 2 Ponit

PANEL CONNECTIVITY

Video Input	VGA, HDMI, DVI	VGA, HDMI, DVI	VGA, HDMI, DVI	VGA, HDMI, DVI	VGA, HDMI, DVI
Video Output	N/A	N/A	N/A	N/A	N/A
Audio Input / Output	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack
USB	N/A	N/A	N/A	N/A	N/A
Internal Control	N/A	N/A	N/A	N/A	N/A

POWER

Power Type	Adapter	Adapter	Adapter	Adapter	Adapter
Power Requirement	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz
Power Consumption	22W	27W	27W	42W	49W
Standby Mode	<0,5W	<0,5W	<0,5W	<0,5W	<0,5W

DIMENSIONS

Product Size(mm) (w x h x d)	350 x 1200 x 250	400 x 1200 x 250	425 x 1300 x 285	500 x 1300 x 285	600 x 1300 x 285
Package Size (mm)	400 x 1300 x 300	450 x 1300 x 300	475 x 1400 x 335	550 x 1400 x 335	650 x 1400 x 335
Product Weight(kg)	34	38	40	43	45
Package Weight(kg)	41	45	47	50	53

OPERATION

Operation Life	7/24 - 50.000 hours	7/24 - 50.000 hours	7/24 - 50.000 hours	7/24 - 50.000 hours	7/24 - 50.000 hours
Working Conditions	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C	Operation Temp.:0~ 40 °C ; Storage Temp.: -20~60 °C
Humidity	10 ~ 80%	10 ~ 80%	10 ~ 80%	10 ~ 80%	10 ~ 80%

CERTIFICATION AND COMPATIBILITY

Safety	EN60950-1	EN60950-1	EN60950-1	EN60950-1	EN60950-1
EMC	Class A	Class A	Class A	Class A	Class A
Environment	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)	ENERGY STAR 6.0 (USA)

OPTIONAL ACCESSORIES

	Barcode, NFC, RFID, Beacon, Bluetooth, Camera, Pin Pad, Industrial Keyboard, Receipt Printer, Audio System, Glass Protector, Mirror Protector, Glass Logo, Colorful Glass
--	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------

OTHER

Included in Packet	Easy Installation Guide, Warranty Document, Power Cable (Other Accessories Externally)
--------------------	-------------------------------------------------------------------------------------------



unisigns



unisigns



unisigns



unisign

www.unisign.com.tr

info@unisign.com.tr



KIOSK