



# SELF PAYMENT KIOSK

Kiosk Family



Restaurant



Retail



Hotel



Bank



Hospital



Amusement Center

While Self Payment Kiosk offers a personalized and interactive experience, new technology payment systems are integrated quickly and efficiently in stores.

### 24/7 Constant Use

As many quick service restaurants and supermarkets are open 24/7 any kiosk solution needs to be up to the task of being in continuous use.

### Anti-Theft Mounting Options

As standard the kiosk can be securely mounted directly to the wall from inside the lockable door – providing an anti-theft flush fit. There is also an optional floor stand available on request when wall mounting is not possible.

### Easy Roll Replace

The till roll for the thermal printer is located in a separate compartment so that staff can quickly and conveniently replace the roll without having to open the main access door.

### Integrated QR Code Scanner & Thermal Receipt Printer


The scanner features an LED light to improve reading ability and can be used to scan barcodes or QR codes in conjunction with special offers or to place orders.

### All-in-One Automated Self Ordering System

The numerous benefits for self service systems are clear, from allowing staff to focus more on customer service, reducing queues and waiting times as well as improving and optimising the overall customer experience. This all-in-one solution is designed for the fast food sector but can also be used in a range of retail spaces providing a PCAP touch screen, QR Code scanner, printer in one solution. There is also space to integrate a credit card payment reader.

21.5" / 32"

Van  
KSPA215MA

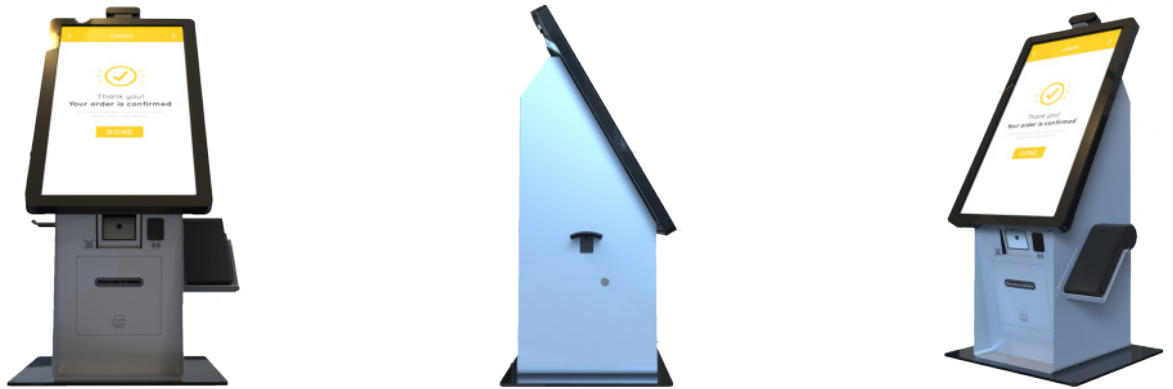

Samsun  
KSSA320MA



Mersin  
KSMA215MA



PANEL	KSSA320MA	KSVA215MA	KSMA215MA
Panel Size	32"	21.5"	21.5"
Resolution	1920*1080	1920*1080	1920*1080
Brightness	400 cd/m <sup>2</sup>	500 cd/m <sup>2</sup>	500 cd/m <sup>2</sup>
Active Display Area (mm)	698.40 (H) x 392.85 (V)	476.00 (H) x 268.00 (V)	476.00 (H) x 268.00 (V)
Response Angle (G-to-G)	8 ms (G to G)	14 ms (G to G)	14 ms (G to G)
Viewing Angle	178° x 178°	178° x 178°	178° x 178°
Contrast Ratio	1200:1 (Typ.) (TM)	1300:1 (Typ.) (TM)	1300:1 (Typ.) (TM)
TOUCH SCREEN	KSSA320MA	KSVA215MA	KSMA215MA
Touch Technology	Projected Capacitive		
Touch Points	10 points Multi-touch		
Glass Hardness	6H (min.)		
INTERNAL PLAYER (OPTIONAL)	KSSA320MA	KSVA215MA	KSMA215MA
CPU	Quad Core		
RAM	2GB		
HDD	16GB		
OS	Android 11		
I/O	HDMI, USB, ETHERNET, WIFI		
POWER	KSSA320MA	KSVA215MA	KSMA215MA
Power Requirement	AC 100 - 240 V~ (+/- 10%) 50/60 Hz		
Power Consumption (Typ.)	47W	32W	32W
Standby Mode	<0,5W		
OPERATION	KSSA320MA	KSVA215MA	KSMA215MA
Operation Life	7/24 - 50.000 hours		
Working Conditions	Operation Temp. : 0~ 50 °C Storage Temp. : - 20~60 °C		
Humidity	10 ~ 80%		
DIMENSIONS	KSSA320MA	KSVA215MA	KSMA215MA
Product Size (mm) (w x h x d)	412 x 718 x 40	400 x 747,43 x 345	450 x 1770 x 400
Package Size (mm)	800 x 490 x 150	410 x 757 x 355	800 x 490 x 150
Product Weight(kg)	58	15	25
Package Weight(kg)	7,5	7,5	7,5
ACCESSORIES	KSSA320MA	KSVA215MA	KSMA215MA
Audio	8Ω, 5W x 2		
Thermal Printer	58mm or 80mm		
1D/2D Barcode Reader	640x480p, 30times/sec		
OPTIONAL	Logo & Brand Color Customization		
OTHER (Included in Package)	Easy Installation Guide, Warranty Document, Power Cable		

unisign / DISPLAY  
TECHNOLOGY



[www.unisign.com.tr](http://www.unisign.com.tr)



Unisign Display Technology



[unisignds](https://www.instagram.com/unisignds)



Unisign Digital Signage



Unisign Digital Signage



[hello@unisign.com.tr](mailto:hello@unisign.com.tr)

[www.unisign.com.tr](http://www.unisign.com.tr)

[hello@unisign.com.tr](mailto:hello@unisign.com.tr)



SELF PAYMENT KIOSK  
KIOSK FAMILY